


# B100-140 Profile

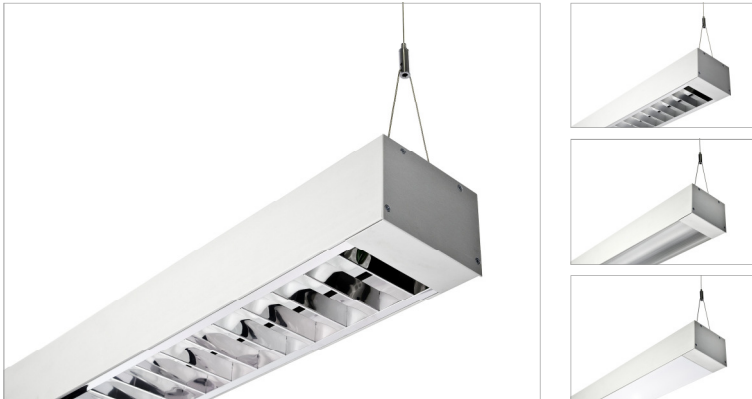


- Universal, linear extruded beam
- Engineered to accept reeded diffusers and parabolic louvre modules
- Applications range from continuous suspended systems, pendant modules, recessed, edge lighting and wall mount task lighting
- SE - Screwless end cap option
- Anodised or powder coat finish


- IP 54 weatherproof option 

## Specification


Length (m)      **LINEA-LITE**      **B100-140**

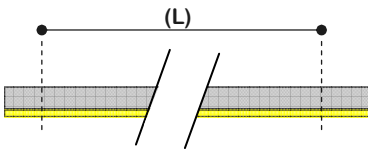









Length allowance	T5-FH	T5-FQ
600mm	14w	24w
900mm	21w	39w
1200mm	28w	54w
1500mm	35w	49w
Length allowance	T8	
610mm	18w	
1220mm	36w	
1530mm	58w	

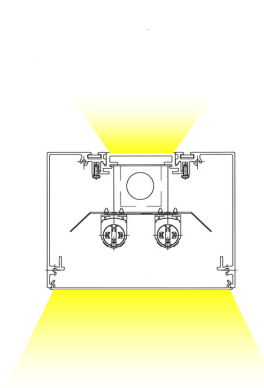

Up-light slot option  
(Non-continuous only)




	Clear reed ✓
	Opal reed ✓
	Satin reed ✓
	Satin louvre ✓
	Mirror louvre ✓
	Suspension Kit ✓
	Plaster frame ✓
	T-bar flange ✓

## Photometrics

## Lamps









cd / 1000 lamp lumens



Dotted line 0 Degrees  
Solid line 90 Degrees

2/54 T5, Clear reeded diffuser

MR11, MR16, GX10

	Maximum lamps / section	Continuous diffuser	Continuous louvre	Overlapped lamps ( Diffuser )
T5 	2 	 ✓	 ✓	 ✓ (2-lamp Max)
T8 	2	✓	✓	✗
PL-L 	1	✓	✗	✗
	1			