


B150-55-EDGE Profile




- Architectural beam profile
- Direct and indirect lighting function
- Discrete shadow edge diffuser feature
- Engineered to accept reeded diffusers and parabolic louvre modules
- Applications range from continuous suspended systems, pendant modules, wall mount bed head lighting or task lighting and washing
- SE - Screwless end cap option
- Separate circuit options
- Anodised or powder coat finish

Specification


Length (m) **LINEA-LITE** **B150-55-EDGE**

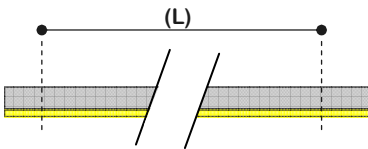

| Length allowance | T5-FH | T5-FQ |
|------------------|-------|-------|
| 600mm | 14w | 24w |
| 900mm | 21w | 39w |
| 1200mm | 28w | 54w |
| 1500mm | 35w | 49w |
| Length allowance | T8 | |
| 610mm | 18w | |
| 1220mm | 36w | |
| 1530mm | 58w | |

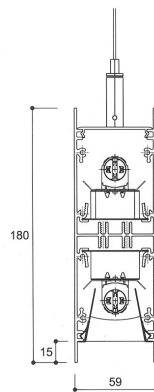

Up-light module
(Continuous)

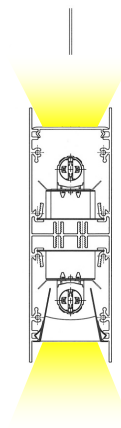


| | |
|--|---------------------|
| | Clear reed ✓ |
| | Opal reed ✓ |
| | Satin reed ✓ |
| | Satin louvre ✓ |
| | Mirror louvre ✓ |
| | Suspension Kit ✓ |

Photometrics

Lamps

cd / 1000 lamp lumens



Dotted line 0 Degrees
Solid line 90 Degrees

1/54 T5 Lamp, Mirror Louvre

Maximum lamps / section

Continuous diffuser

Continuous louvre

Overlapped lamps (Diffuser)

| Lamp Type | Maximum lamps / section | Continuous diffuser | Continuous louvre | Overlapped lamps (Diffuser) |
|-----------|-------------------------|---------------------|-------------------|-------------------------------|
| T5 | 1 | ✓ | ✓ | ✓ (1-lamp Max) |
| T8 | 1 | ✓ | ✓ | ✗ |
| PL-L | 1 | ✓ | ✗ | ✗ |
| MR11 | 1 | | | |